

RIEGL VUX[®]-1HA

- very high measurement rate up to 1,000,000 meas./sec
- very high scan speed up to 250 scans / second
- 5 mm survey-grade accuracy
- field of view 360° for unrestricted data acquisition
- regular point pattern, perfectly parallel scan lines
- cutting edge RIEGL technology providing:
 - echo signal digitization
 - online waveform processing
 - multiple-time-around processing
- multiple target capability - practically unlimited number of target echoes
- **NEW** Smart Waveform Data Output optional
- compact (227x180x125 mm), lightweight (3.5 kg), and rugged
- userfriendly mounting
- mechanical and electrical interface for IMU mounting
- electrical interfaces for GPS data string and sync pulse (1PPS)
- LAN-TCP/IP interface
- scan data storage on internal 240 GByte SSD memory

RIEGL's VUX-1HA High Accuracy kinematic LiDAR sensor is a very high speed, non-contact profile measuring system using a narrow laser beam and a fast line scanning mechanism, enabling full 360 degree beam deflection without any gaps.

High performance pulsed laser ranging, based on RIEGL's well-proven echo signal digitization technology with subsequent online waveform processing results in superior measurement capabilities even under adverse atmospheric conditions and in excellent multiple target echo discrimination.

The RIEGL VUX-1HA is a compact and lightweight laser scanner, mountable in any orientation and even under limited space conditions on land based vehicles, tunnel measuring devices, watercraft, etc.

The instrument needs only one power supply and provides line scan data via the integrated LAN-TCP/IP interface. The binary data stream can easily be decoded by user-designed software making use of the available software library RiVLib.

Typical applications include

- Mobile Laser Mapping
- Tunnel Profile Measurement
- Railway Applications like Clearance Analysis, etc



visit our website
www.riegl.com



Technical Data *RIEGL VUX®-1 HA*

Laser Product Classification

Class 1 Laser Product

according to IEC 60825-1:2014

The following clause applies for instruments delivered into the United States: Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007

CLASS 1
LASER PRODUCT

Range Measurement Performance

Measuring Principle

time of flight measurement, echo signal digitization, online waveform processing, multiple-time-around-capability

Laser Pulse Repetition Rate PRR ¹⁾	300 kHz	500 kHz	750 kHz	1000 kHz
Max. Measuring Range ^{2) 3)}				
natural targets $\rho \geq 10\%$	150 m	120 m	100 m	85 m
natural targets $\rho \geq 80\%$	420 m	330 m	270 m	235 m
Max. Number of Targets per Pulse ⁴⁾	practically unlimited (details on request)			

1) Rounded values.
2) Typical values for average conditions. Maximum range is specified for flat targets with size in excess of the laser beam diameter, perpendicular angle of incidence, and for atmospheric visibility of 23 km. In bright sunlight, the max. range is shorter than under overcast sky.
3) Ambiguity to be resolved by post-processing with RIMTA software.
4) If more than one target is hit, the total laser transmitter power is split and, accordingly, the achievable range is reduced.

Minimum Range

Accuracy ^{5) 7)}

Precision ^{6) 7)}

Laser Pulse Repetition Rate ^{1) 8)}

Max. Effective Measurement Rate ¹⁾

Echo Signal Intensity

Laser Wavelength

Laser Beam Divergence

Laser Beam Footprint (Gaussian Beam Definition)

1.2 m

5 mm

3 mm

up to 1000 kHz

up to 1 000 000 meas./sec. (@ 1000 kHz PRR & 360° FOV)

for each echo signal, high-resolution 16 bit intensity information is provided

near infrared

0.5 mrad ⁹⁾

4.5 mm @ exit, 5 mm @ 5 m, 6.6 mm @ 10 m,

13 mm @ 25 m, 25 mm @ 50 m, 50 mm @ 100 m

5) Accuracy is the degree of conformity of a measured quantity to its actual (true) value.

6) Precision, also called reproducibility or repeatability, is the degree to which further measurements show the same result.

7) One sigma @ 30 m range under RIEGL test conditions.

8) User selectable.

9) Measured at the 1/e² points. 0.50 mrad corresponds to an increase of 50 mm of beam diameter per 100 m distance.

Scanner Performance

Scanning Mechanism

Field of View (selectable)

Scan Speed (selectable)

Angular Step Width $\Delta \theta$ (selectable)

between consecutive laser shots

Angle Measurement Resolution

Internal Sync Timer

Scan Sync (optional)

Smart Waveform Data Output (optional)

rotating mirror

360° „full circle“

10 - 250 revolutions per second, equivalent to 10 - 250 scans/sec

$0.0036^\circ \leq \Delta \theta \leq 0.3^\circ$

0.001°

for real-time synchronized time stamping of scan data

scanner rotation synchronization

providing digitized echo signal information for specific target echoes

Data Interfaces

Configuration

Scan Data Output

GNSS Interface

LAN 10/100/1000 Mbit/sec

LAN 10/100/1000 Mbit/sec or USB 2.0

Serial RS232 interface for data string with GNSS-time information,

TTL input for 1PPS synchronization pulse

240 GByte SSD

TTL input/output

SMA connector

Internal Memory

External Camera

External GNSS Antenna

General Technical Data

Power Supply Input Voltage / Consumption ¹⁰⁾

Main Dimensions ¹⁰⁾

VUX-1HA without / with Cooling Fan

Weight ¹⁰⁾

VUX-1HA without / with Cooling Fan

Humidity

Protection Class

Temperature Range ¹¹⁾

11 - 34 V DC / typ. 65 W

227 x 180 x 125 mm / 227 x 209 x 129 mm

approx. 3.5 kg / approx. 3.75 kg

max. 80 % non condensing @ 31°C


IP64, dust and splash-proof

-10°C up to +40°C (operation) / -20°C up to +50°C (storage)


10) without external IMU/GNSS, cooling fan not in operation

11) The instrument requires air convection with a minimum flow rate of 5 m/s for continuous operation at +15 °C and above. If the necessary flow rate cannot be provided by the moving platform, the cooling fan (included in the scope of delivery) has to be used.


PRR = 300 kHz

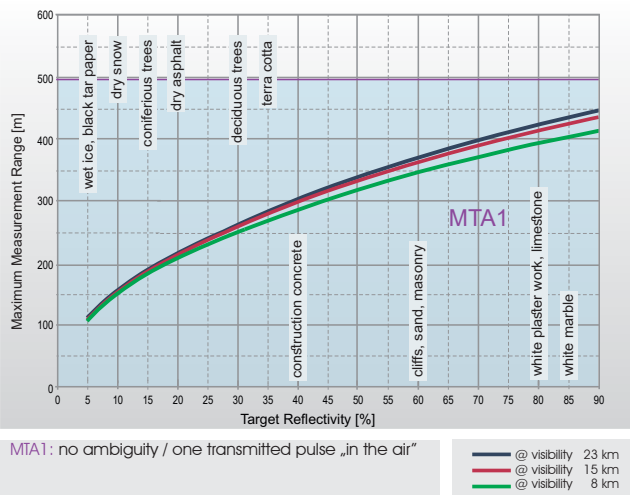


PRR = 500 kHz

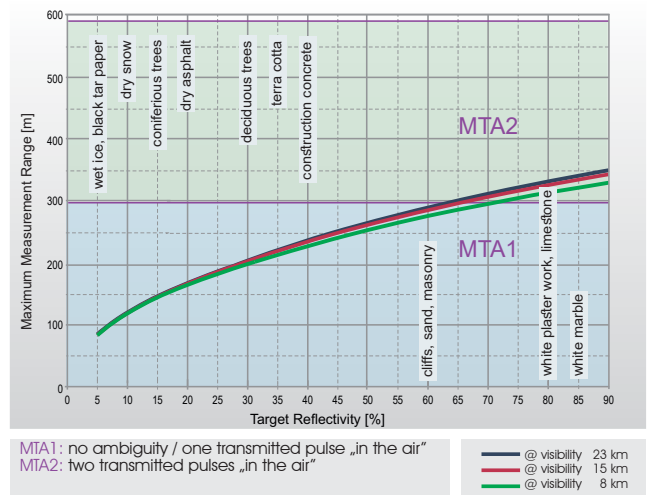

PRR = 750 kHz

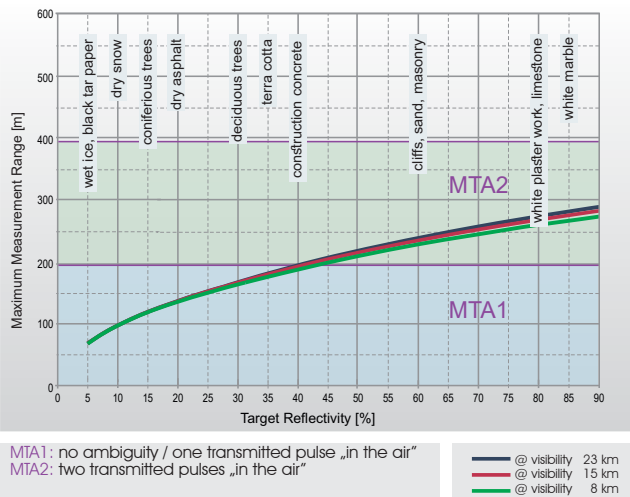

PRR = 1000 kHz

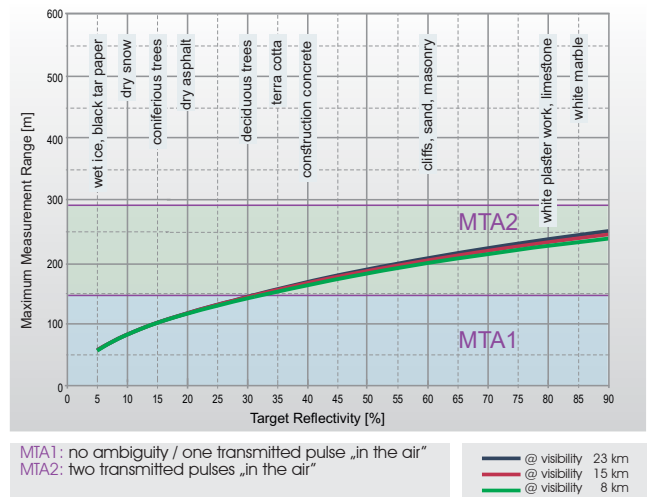

RIEGL VUX®-1HA Additional Equipment and Integration

Additional Equipment for *RIEGL VUX-1HA*

Cooling Fan

Lightweight structure with two axial fans providing forced air convection for applications where sufficient natural air flow cannot be guaranteed. Power supply is provided via a connector on the rear side of the *RIEGL VUX-1HA*. The cooling fan can be mounted either on the top side or on the bottom side of the *RIEGL VUX-1HA* and is included in the scanner's scope of delivery. The cooling fan has to be mounted whenever the environmental conditions/temperatures require the use (see "temperature range" on page 2 of this data sheet).

Protective Cap


To shield the glass tube of the *RIEGL VUX-1HA* from mechanical damage and soiling, a protective cap is provided to cover the upper part of the instrument during transport and storage.

Options for *RIEGL VUX-1HA* Integration


RIEGL is developing user-friendly, application- and installation-specific solutions for integration of the *VUX-1HA* LiDAR sensor into whatsoever type of moving platform.




Dimensional Drawings *RIEGL* VUX®-1HA

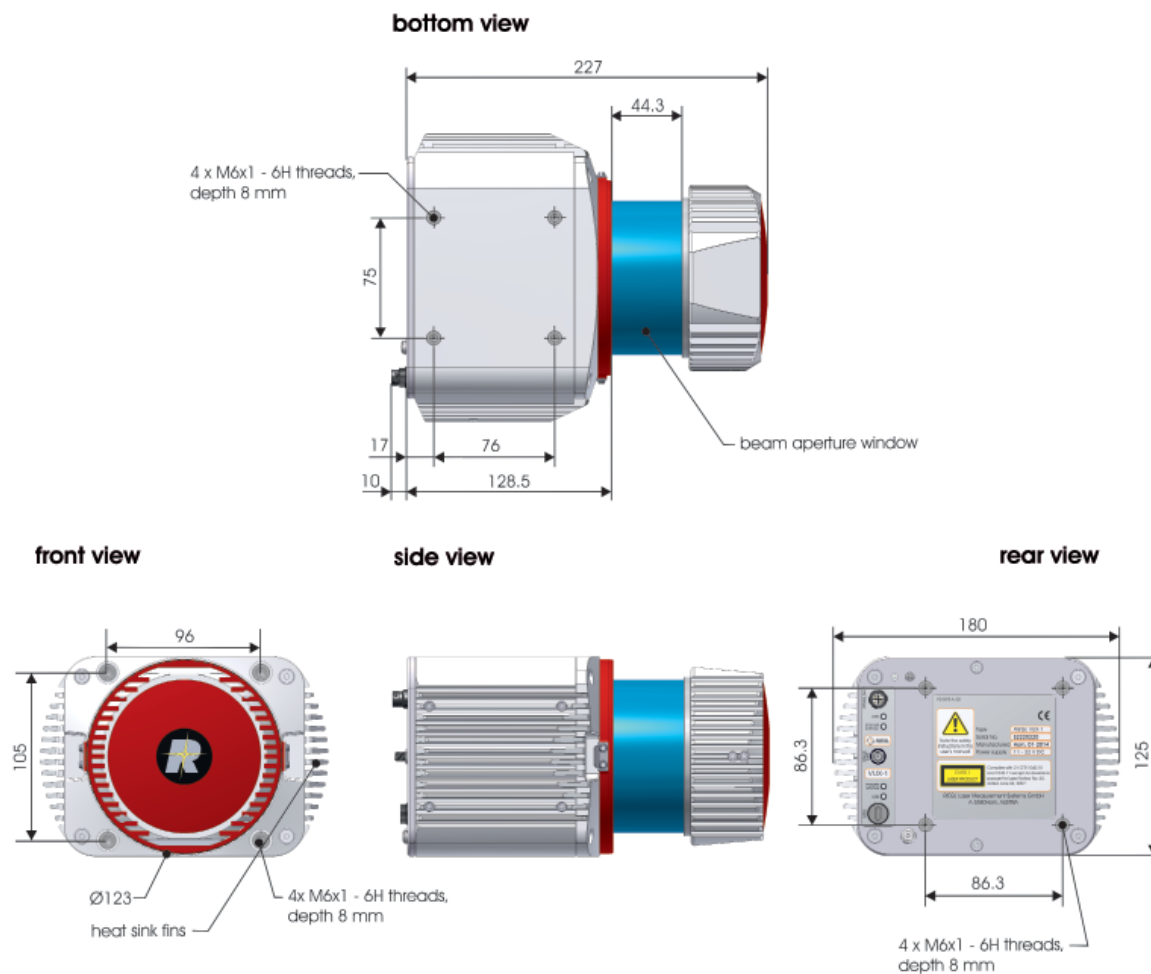

Dimensional Drawings *RIEGL* VUX®-1HA with Cooling Fan Device

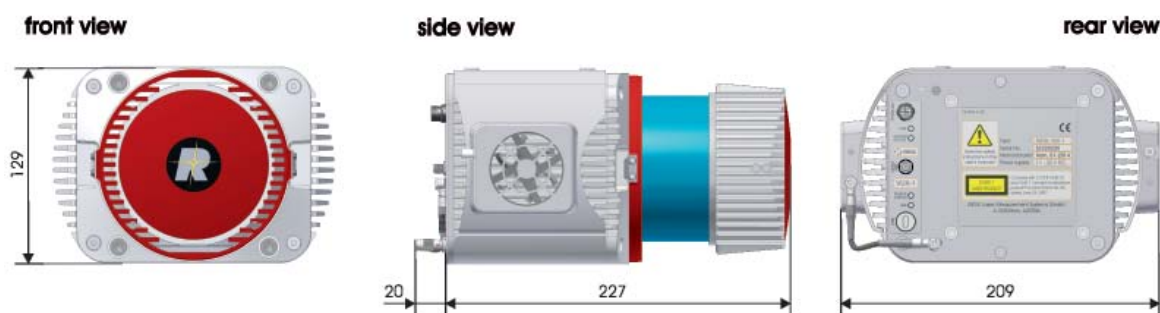

all dimensions in mm

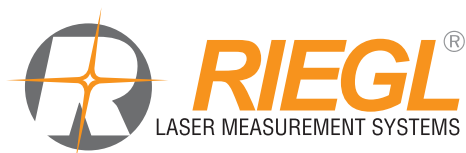

RIEGL Laser Measurement Systems GmbH
 Riedenburgerstraße 48
 3580 Horn, Austria
 Phone: +43 2982 4211 | Fax: +43 2982 4210
 office@riegl.co.at
 www.riegl.com

RIEGL USA Inc.
 Orlando, Florida | info@rieglusa.com | www.rieglusa.com
RIEGL Japan Ltd.
 Tokyo, Japan | info@riegl-japan.co.jp | www.riegl-japan.co.jp
RIEGL China Ltd.
 Beijing, China | info@riegl.cn | www.riegl.cn

www.riegl.com